



PRODUCT FEATURES


- 3 HP Induction motor
- Belt driven permanently lubricated transmission
- Heat-treated hardened steel alloy gears and shafts
- Three fixed speeds
- Thermal overload protection
- Rigid cast iron body
- 60 litre stainless steel bowl
- Removable stainless steel bowl safety guard with built in ingredient chute
- Safety interlocked bowl guard and bowl lift Front mounted controls
- 15 minute analogue timer
- Non-slip rubber feet
- 1.8m cord no plug supplied

STANDARD ACCESSORIES

- | | | |
|-----------------------------------|-------|--------------|
| • 60 litre bowl (stainless steel) | Ref # | SP60-32 |
| • Beater (aluminum) | Ref # | SP60-30 |
| • Whisk (stainless steel) | Ref # | SP60-31 |
| • Dough hook (aluminum) | Ref # | SP60-29 |
| • Bowl Trolley with handle | Ref # | Trolley/60-N |


OPTIONAL ACCESSORIES

- | | | |
|--------------------------------------|-------|------------|
| • 30L Reduction Kit w/tools | Ref # | ACC30/SP60 |
| • Reinforced Whisk (stainless steel) | Ref # | 60031-A |
| • Bowl Scraper | Ref # | SP60/SCRP |

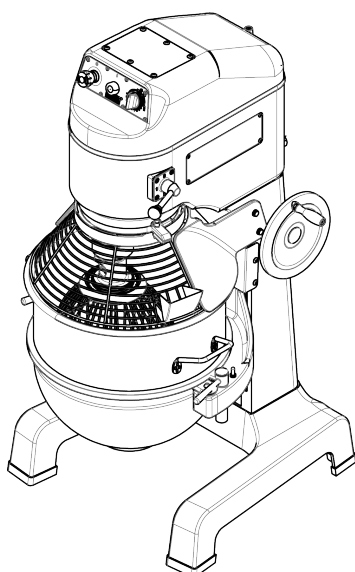

TECHNICAL DATA

Power	3 HP
Electrical data	415V/50/3 Draw 5.8 Amps
	Three Phase - no plug supplied
Speed	3 speed - 99 / 167 / 329 rpm
Dimensions (LxWxH)	778 x 638 x 1316 mm
Gross weight	270 kg
Reference	SP60-S

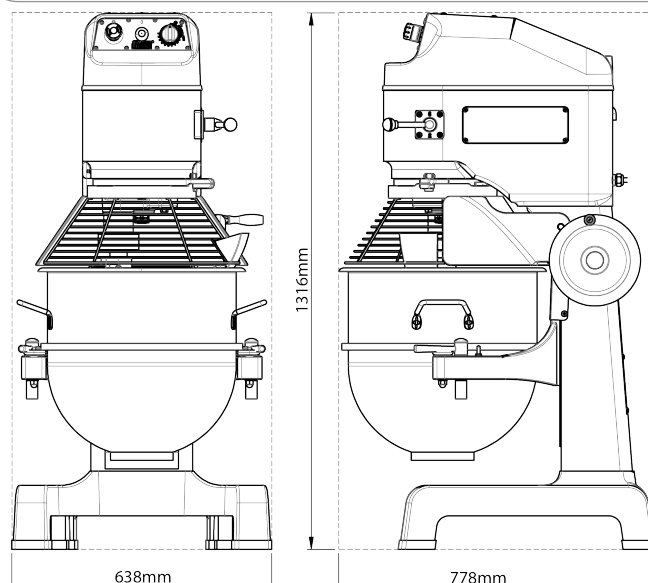

STANDARDS

